


2535 Rose Parkway  
Sikeston, MO 63801  
1-888-669-0003

# Construction Trailer Specialists, Inc.

## Rock Master: Quarter Frame

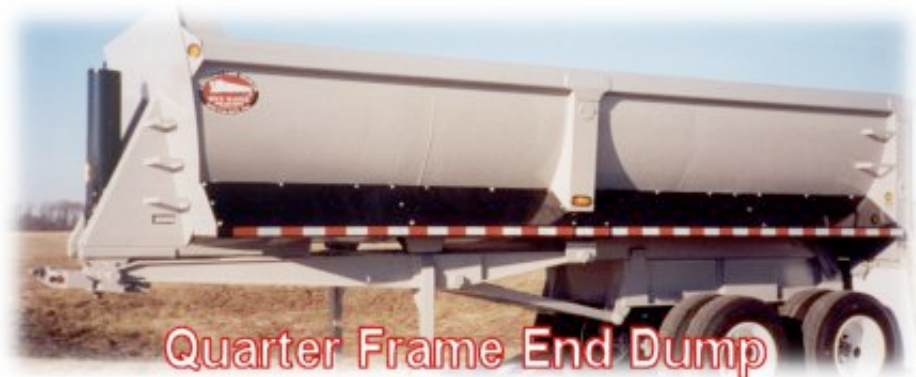

### Specifications:

LENGTH:	32 FT. QUARTER FRAME
SIDES:	48 INCHES
BODY:	1/4" HARDOX 450 (175 KSI, 450 BRINELL HARDNESS)
NOSE & GATE:	3/16" HARDOX 450 (175 KSI, 450 BRINELL HARDNESS)
TOP RAIL:	3 1/2" X 5 1/2" X 1/4" HIGH STRENGTH STEEL 80,000 PSI ROLL FORMED
LONGITUDINAL:	8" X 8" 1/4" HIGH STRENGTH STEEL
BODY BRACES:	1/4" HIGH STRENGTH STEEL INTERNALLY STIFFENED
DRAFT ARMS:	I-BEAM PRIMARY & SECONDARY DRAFT ARMS WITH DROP LEGS
HOIST:	8"-5 STAGE INVERTED TRUNION MOUNT (CUSTOM HOIST)
SUSPENSION:	SINGLE POINT KEEPS ALL 8 TIRES ON THE GROUND HUTCH H-900 50,000 LB.
AXLES:	ROCKWELL AXLES 25,000 LB. HUB POLITED
ABS BRAKES:	ABS BRAKES ON ONE AXLE 2S1M
TAILGATE:	ELECTRIC OVER AIR OPERATED HIGH LIFT GIVES 87" OF CLEARANCE. BRACING IS 5 3/4" X 3 3/4" X 3/16" HIGH STRENGTH STEEL. MUDFLAPS INTEGRATED -"OVER THE CENTER" LOCKS
TIRES:	DUNLOP SP-160 11R X 24.5 RADIALS ON STEEL WHEELS
LADDERS:	FRONT AND REAR
FENDERS:	REAR BOLTED ON
WIRE HARNESS:	CUSTOM FIT AND FULLY SEALED (GROTE)
PAINT:	CARBOLINE PRIMER AND CARBOLINE PAINT (WHITE)