


Booster **X-L 22 MB**

Capacity: 22,000 lbs. - 1 Axle (Use for 8 Axle Configuration)

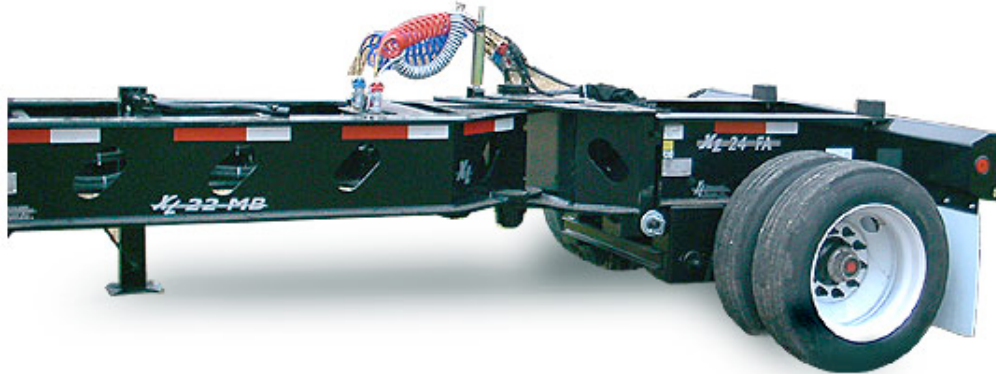

SPECIFICATIONS

STANDARDS SPECIFICATIONS

T1 FLANGE 80 K WEB
14' 1" SPACING FROM CENTER OF LAST AXLE
ON TRAILER TO CENTER OF FIRST AXLE
PIVOT ON BOOSTER
DROP LEG JACK
102" OVER ALL DECK WIDTH

SUSPENSION

25,000 # AIR RIDE

AXLES

(3) 22,500 # 5/8" WALL
HUB PILOT, OUTBOARD DRUMS
16 1/2" X 7" BRAKES
LIMIT STRAPS

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5

LIGHTING

APPROVED
RUBBER MT. LIGHTS
2 CLEARANCE LIGHTS / SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LT PACKAGE

PAINT

BLACK, NEW CAT YELLOW & IH RED
PRIMED BEFORE PAINT
2 PART EPOXY PRIMER
URETHANE PAINT
RED/WHITE CONSPICUITY TAPE
AIR & ELEC. DONE AFTER PAINT

WEIGHT + / - 3% - 5,480 lbs.