


## Hydraulic Detachable Gooseneck **XL 80 HDG**

Capacity: 80,000 IN 10' - OAL: 48' 5"

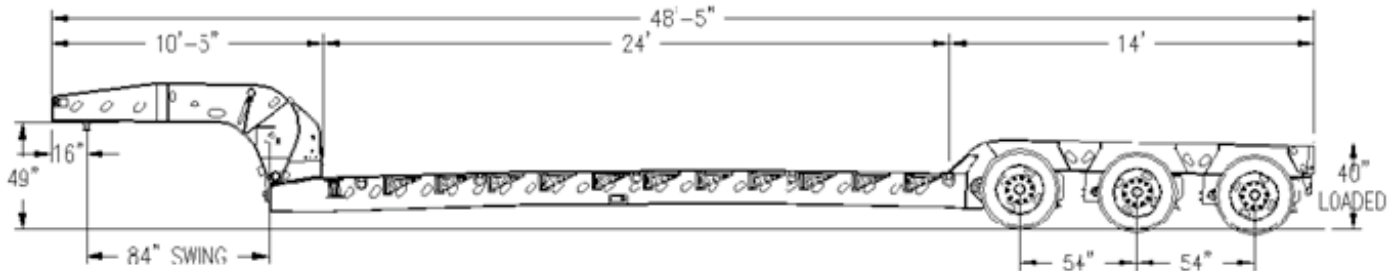

### **SPECIFICATIONS**

#### **GOOSENECK**

HYD. DETACHABLE NARROW NECK  
APPROXIMATELY 35" TRAVEL  
10' 5" NON GROUND BEARING  
7 POSITION 5TH WHEEL HEIGHT  
84" SWING CLEARANCE  
16" KING PIN SETTING  
HYDRAULICS RUN OFF OF WET KIT  
AIR OPERATED LOCK W/ MANUAL SAFETY LATCH

#### **MAIN DECK**

T I FLANGE 80K WEB  
4 BEAMS 16", (FULLY CAMBERED)  
24' LONG  
102" WIDE  
24" LOADED DECK HEIGHT  
8" GROUND CLEARANCE  
10" & 4" JR. I-BEAM 12" ALT. CTRS.  
10 BENT D-RINGS TOTAL  
1 3/8" APITONG DECKING RAISED  
DECKED OUTSIDE OF MAIN BEAMS, ONLY  
SWING OUT OUTRIGGERS ON 24" CENTERS  
DOUBLE OUTRIGGERS UP FRONT

#### **REAR BRIDGE**

OPEN WHEELS W/ BOLSTERS  
OPEN BOOM WELL  
40" DECK HEIGHT  
14' LONG  
2 BENT D-RINGS IN TAIL CHANNEL  
MUD FLAPS  
ONE PAIR OF FLAG HOLDERS

#### **SUSPENSION**

25,000 # AIR RIDE

#### **AXLES**

(3) 25,000# NOMINAL 5/8" WALL  
54" SPACING  
HUB PILOT, OUTBOARD DRUMS  
16 1/2" X 7" BRAKES  
AUTO SLACK ADJUSTERS  
LIMIT CHAINS ON ALL AXLES  
SPRING BRAKES ON 1 AXLE  
2S1M ABS

#### **WHEELS & TIRES**

8.25 X 22.5 STEEL RIMS  
255/ 70R/ 22.5 H RATED TIRES

#### **LIGHTING**

12V SEALED HARNESS D.O.T. APPROVED  
2 TAIL LT PKG W/ ALUMINUM COVER  
1 MID-TURN SIGNAL PER SIDE  
2 CLEARANCE LIGHTS PER SIDE  
7 POLE ELECTRICAL SOCKET  
RUBBER MT. LIGHTS

#### **PAINT**

BLACK, IH RED, OR NEW CAT YELLOW  
PRIMED BEFORE PAINT  
2 PART EPOXY PRIMER  
URETHANE PAINT  
AIR & ELEC. DONE AFTER PAINT  
RED/WHITE CONSPICUITY TAPE

**WEIGHT + / - 3% - 18,100 lbs.**  
**Additional Weight per foot of trailer: 217 lbs.**