


Mechanical Detachable Extendable **XL-110 MDE**

Capacity: 100,000 CONC: 80,000 IN 10' CLOSED OAL: 48' OAL: 48'

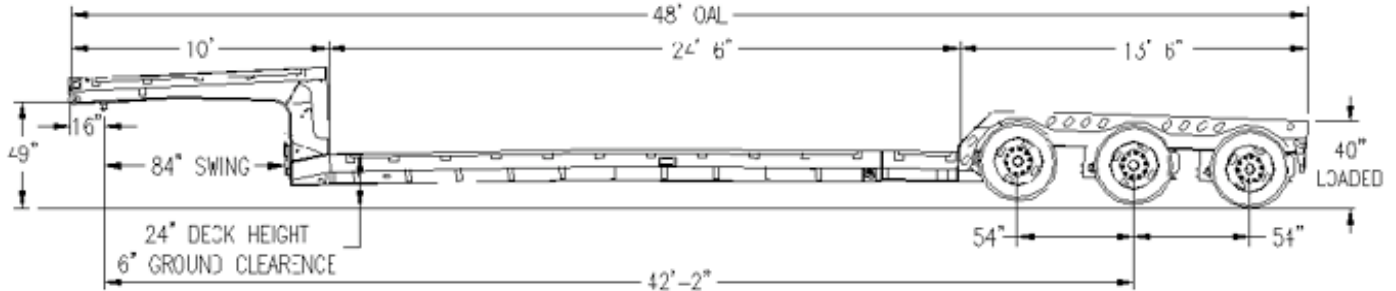

SPECIFICATIONS

GOOSENECK

10' LONG MECH. DET.
ALUMINUM MUD FLAPS
102" WIDE
16" KING PIN SETTING W/ 84" SWING CLEARANCE
5/16" x 2" RUB RAIL W/ SINGLE PIPE SPOOLS
49" 5TH WHEEL HEIGHT
ONE PAIR OF FLAG HOLDERS
1 1/8" APITONG DECKING FLUSH

MAIN DECK

T I FLANGE 80K WEB
24' 6" / 41' 4"
102" WIDE
24" LOADED DECK HEIGHT
6" GROUND CLEARANCE
FAB I BEAM OUTSIDE RAILS
DOUBLE BOX BEAM CONSTRUCTION
5 BENT D-RINGS PER SIDE, 10 TOTAL
6" JR. I-BEAM CROSS MEMBERS ON 12" ALT. CTRS
EXTEND-A-TRAC (PATENT PENDING)
1 1/8" APITONG DECKING FLUSH
AIR OPERATED LOCK PIN W/ 5 STOPS 2'-3'-5'-5'-5'
6" GREASABLE ROLLERS

REAR BRIDGE

13' 6" LONG
102" WIDE
COVERED WHEELS W/ 40" DECK HT.
1 1/8" APITONG DECKING FLUSH
ONE PAIR OF FLAG HOLDERS
2 BENT D-RINGS IN TAIL CHANNEL

SUSPENSION

25,000 # AIR RIDE

AXLES

(3) 25,000# NOMINAL
54" SPACING
HUB PILOT, OUTBOARD DRUMS
16 1/2" X 7" BRAKES
NO ABS REQUIRED

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5

LIGHTING

12V SEALED HARNESS D.O.T. APPROVED
RUBBER MT. LIGHTS
1 MID-TURN SIGNAL / SIDE
2 CLEARANCE LIGHTS / SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LT PKG W/ ALUM. COVER

PAINT

BLACK, NEW CAT YELLOW & IH RED
PRIMED BEFORE PAINT
2 PART EPOXY PRIMER
URETHANE PAINT
RED/WHITE CONSPICUITY TAPE
AIR & ELEC. DONE AFTER PAINT

WEIGHT + / - 3% - 28,100 lbs.
Additional Weight per foot of trailer: 445 lbs.