


Mechanical Full Width Gooseneck **XL 50-MFG**

Capacity: 50,000 IN 16' OAL: 48'

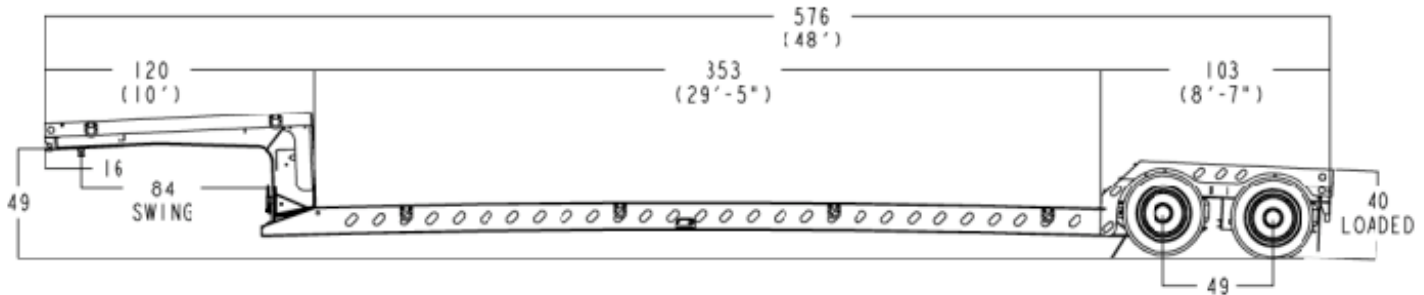

SPECIFICATIONS

GOOSENECK

MECH. DETACHABLE FULL WIDTH
10' LONG
102" WIDE
49" 5TH WHEEL HEIGHT
84" SWING CLEARANCE
16" KING PIN SETTING
2 BENT D-RINGS PER SIDE-4 TOTAL
1 1/8" APITONG DECKING FLUSH
ALUMINUM MUD FLAPS

MAIN DECK

T I FLANGE 80K WEB
4 FAB I-BEAMS 12"
29' 5" LONG
102" WIDE
18" LOADED DECK HEIGHT
6" GROUND CLEARANCE
4"JR I-BEAM CROSSMEMBERS ON 12" SPACING
4 BENT D-RINGS PER SIDE-8 TOTAL
1 1/8" APITONG DECKING FLUSH
RAMP TAPERS TO 4"

REAR BRIDGE

8' 7" LONG
40" LOADED DECK HEIGHT
102" WIDE
1 1/8" APITONG DECKING FLUSH
2 BENT D-RINGS IN TAIL CHANNEL
LOAD BEARING

SUSPENSION

25,000 # AIR RIDE

AXLES

(2) 25,000 # NOMINAL
49" SPACING
HUB PILOT, OUTBOARD DRUMS
4S2M ABS
16 1/2" X 7" BRAKES
2 PAIR SPRING BRAKES

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255/ 70R/ 22.5 TIRES

LIGHTING

12V SEALED HARNESS D.O.T. APPROVED
RUBBER MT. LIGHTS
1 MID-TURN SIGNAL / SIDE
2 CLEARANCE LIGHTS / SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LT PKG W/ ALUM. COVER

PAINT

BLACK, NEW CAT YELLOW & IH RED
PRIMED BEFORE PAINT
2 PART EPOXY PRIMER
URETHANE PAINT
RED/WHITE CONSPICUITY TAPE
AIR & ELEC. DONE AFTER PAINT

WEIGHT +/- 3% = 14,100 lbs.
Additional Weight per foot of trailer: 180 lbs.